




MONOLINE-MD12

A surface mounted linear LED luminaire designed for two lines of Monoflex LED, with 2-way light distribution. Manufactured from extruded anodised aluminium, finished in white or black, with opal diffusers. Suitable for surface mounting via concealed sprung metal fixing clips.

MONOFLEX LED available in static white, tunable white and dynamic colour changing, with a choice of Nichia, Osram or Lumileds LED.

TECHNICAL

| | |
|-------------------------|-----------------------------|
| Housing: | Anodised Aluminium |
| Diffuser: | Polycarbonate UV Stabilised |
| Lengths: | 3000mm |
| Max LED Wattage: | 24w/m |
| Max PCB Width: | 12mm |
| Hot-Spot Free: | ≥112 LED/m |
| Weight: | 0.70kg/m |
| IP Rating: | IP40 |

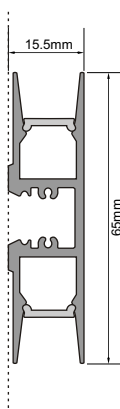


FINISH




CATALOGUE NO.

| | |
|--------------------|--------------------------------------|
| MD12-W-3-OC | 3000mm matt white with opal diffuser |
| MD12-B-3-OC | 3000mm matt black with opal diffuser |


ACCESSORIES



MD12-EC Aluminium end cap



MD12-MB Mounting bracket 2 every 1 metres



MD12-LC Linear connector