


# Horto 160, 1 spot

**CONFIGURA ONLINE**  
macrolux.store



## Horto 160, 1 spot 12-17w, CRI 95

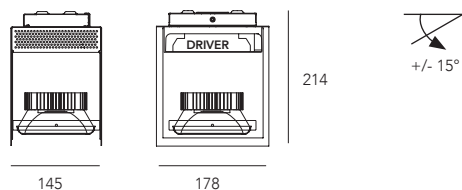

Apparecchio a plafone LED, completo di alimentatore e connessioni, tolleranza colore 3 McAdams, gradi di emissione 14°, 28°, 36°, orientabilità +/-15°.

Surface mounted LED, complete with driver and connections, colour tolerance 3 McAdams, emission degrees 14°, 28°, 36°, adjustability +/-15°.

### 815.0145.01.14--

12w, 3000°K, 1500lm, 125lm/w, CRI 95,



### 815.0145.01.28--

12w, 3000°K, 1500lm, 125lm/w, CRI 95,



### 815.0145.01.36--

12w, 3000°K, 1500lm, 125lm/w, CRI 95,



### 815.0145.02.14--

17w, 3000°K, 2070lm, 122lm/w, CRI 95,



### 815.0145.02.28--

17w, 3000°K, 2070lm, 122m/w, CRI 95,



### 815.0145.02.36--

17w, 3000°K, 2070lm, 122m/w, CRI 95,



cod. 815.0145.\*\*.2700.\*\*-- per 2700°K

cod. 815.0145.\*\*.4000.\*\*-- per 4000°K

**22** tutto nero  
*all in black*

**24** involucro nero  
interno luce bianco  
*black shell  
white light inside*

**42** involucro bianco  
interno luce nero  
*white shell  
black light inside*

**44** tutto bianco  
*all in white*


## horto 160, 1 spot DALI

### 815.0145.03.(°K).(X°).--

17w, 2070lm, 122lm/w, CRI 95,

# Horto 160, 2 spot

**CONFIGURA ONLINE**  
macrolux.store

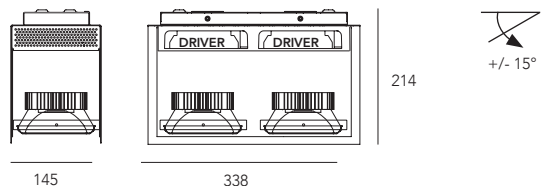

## Horto 160, 2 spot 12-17w, CRI 95

IP 40  $\text{UL}$   $\text{CE}$   $\text{A}$   $\text{230 Volt}$

Apparecchio a plafone LED, completo di alimentatore e connessioni, tolleranza colore 3 McAdams, gradi di emissione 14°, 28°, 36°, orientabilità +/-15°.

Surface mounted LED, complete with driver and connections, colour tolerance 3 McAdams, emission degrees 14°, 28°, 36°, adjustability +/-15°.

**815.0146.01.14--** 22 24 42 44  
2X12w, 3000°K, 2x1500lm, 125lm/w, CRI 95,

◀ 14°

**815.0146.01.28--** 22 24 42 44  
2X12w, 3000°K, 2x1500lm, 125lm/w, CRI 95,

◀ 28°

**815.0146.01.36--** 22 24 42 44  
2X12w, 3000°K, 2x1500lm, 125lm/w, CRI 95,

◀ 36°

**815.0146.02.14--** 22 24 42 44  
2X17w, 3000°K, 2x2070lm, 122lm/w, CRI 95,

◀ 14°

**815.0146.02.28--** 22 24 42 44  
2X17w, 3000°K, 2x2070lm, 122lm/w, CRI 95,

◀ 28°

**815.0146.02.36--** 22 24 42 44  
2X17w, 3000°K, 2x2070lm, 122lm/w, CRI 95,

◀ 36°

cod. 815.0146.\*\*.2700.(X°).-- per 2700°K

cod. 815.0146.\*\*.4000.(X°).-- per 4000°K

**22** tutto nero  
all in black

**24** involucro nero  
interno luce bianco  
black shell  
white light inside

**42** involucro bianco  
interno luce nero  
white shell  
black light inside

**44** tutto bianco  
all in white


## Horto 160, 2 spot DALI

**815.0146.03.(°K).(X°).--**  
2x17w, 2070lm, 122lm/w, CRI 95,

# Horto 160, 3 spot

**CONFIGURA ONLINE**

macrolux.store

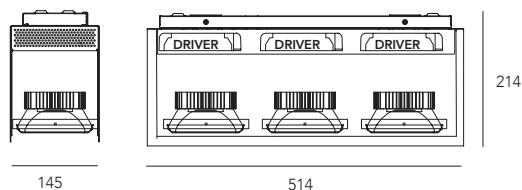

## Horto 160, 3 spot 12-17w, CRI 95

IP 40

Apparecchio a plafone LED, completo di alimentatore e connessioni, tolleranza colore 3 McAdams, gradi di emissione 14°, 28°, 36°, orientabilità +/-15°.

Surface mounted LED, complete with driver and connections, colour tolerance 3 McAdams, emission degrees 14°, 28°, 36°, adjustability +/-15°.

**815.0148.01.14--** 22 24 42 44  
3X12w, 3000°K, 3x1500lm, 125lm/w, CRI 95,

◀ 14°

**815.0148.01.28--** 22 24 42 44  
3X12w, 3000°K, 3x1500lm, 125lm/w, CRI 95,

◀ 28°

**815.0148.01.36--** 22 24 42 44  
3X12w, 3000°K, 3x1500lm, 125lm/w, CRI 95,

◀ 36°

**815.0148.02.14--** 22 24 42 44  
3X17w, 3000°K, 3x2070lm, 122lm/w, CRI 95,

◀ 14°

**815.0148.02.28--** 22 24 42 44  
3X17w, 3000°K, 3x2070lm, 122lm/w, CRI 95,

◀ 28°

**815.0148.02.36--** 22 24 42 44  
3X17w, 3000°K, 3x2070lm, 122lm/w, CRI 95,

◀ 36°

cod. 815.0148.\*\*.2700.\*\*-- per 2700°K

cod. 815.0148.\*\*.4000.\*\*-- per 4000°K

**22** tutto nero  
*all in black*

**24** involucro nero  
interno luce bianco  
*black shell  
white light inside*

**42** involucro bianco  
interno luce nero  
*white shell  
black light inside*

**44** tutto bianco  
*all in white*

## Horto 160, 3 spot DALI

**815.0148.03.(°K).(X°)--**

3x17w, 3x2070lm, 122lm/w, CRI 95,