


Mico 230V

CONFIGURA ONLINE

macrolux.store

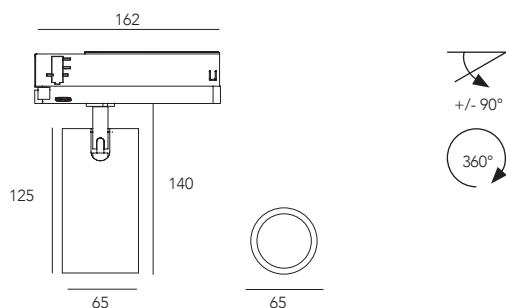

Mico 230v



Proiettore LED per adattatore trifase meccanico a binario, con alimentatore elettronico a bordo, gradi di emissione 14, 25°, 35° orientabilità +/-90°.

Projector LED with a mechanical three-phase track adapter for, with electronic driver inside, emission degrees 14°, 25°, 35° adjustability +/-90°.

139.0230.14.-- 2 4
9w, 3000°K, 1200lm, 133lm/w, CRI>90,



139.0230.25.-- 2 4
9w, 3000°K, 1200lm, 133lm/w, CRI>90,



139.0230.35.-- 2 4
9w, 3000°K, 1200lm, 133lm/w, CRI>90,



cod. 139.0230.X.2700.-- per 2700°K
cod. 139.0230.X.4000.-- per 4000°K

2 nero opaco
matt black

4 bianco opaco
matt black

frangiluce a nido d'ape
honeycomb

139.01 1 pc



schermo a croce
cross baffle

139.02 1 pc

