

## Racy, proiettore track



Proiettore con adattatore per binario trifase, completo di LED COB, driver incluso, gradi di emissione 15° (narrow), 24° (spot), oppure 38° (flood), orientabilità +/-90°.

*Projector with a three-phase track adapter, with spot LED COB, driver included, emission degrees 15° (narrow), 24° (spot) or 38° (flood), adjustability +/-90°.*

**181.3000.15.--** 8 11  
30w, 120-230V, 3000°K, 3450lm, 115lm/w, CRI>90,



**181.3000.24.--** 8 11  
30w, 120-230V, 3000°K, 3450lm, 115lm/w, CRI>90,



**181.3000.38.--** 8 11  
30w, 120-230V, 3000°K, 3450lm, 115lm/w, CRI>90,




### Su richiesta - On request

cod. 181.2700.\*\*.-- per 2700°K  
cod. 181.4000.\*\*.-- per 4000°K

**8** nero texturizzato  
texturized black

**11** bianco texturizzato  
texturized white

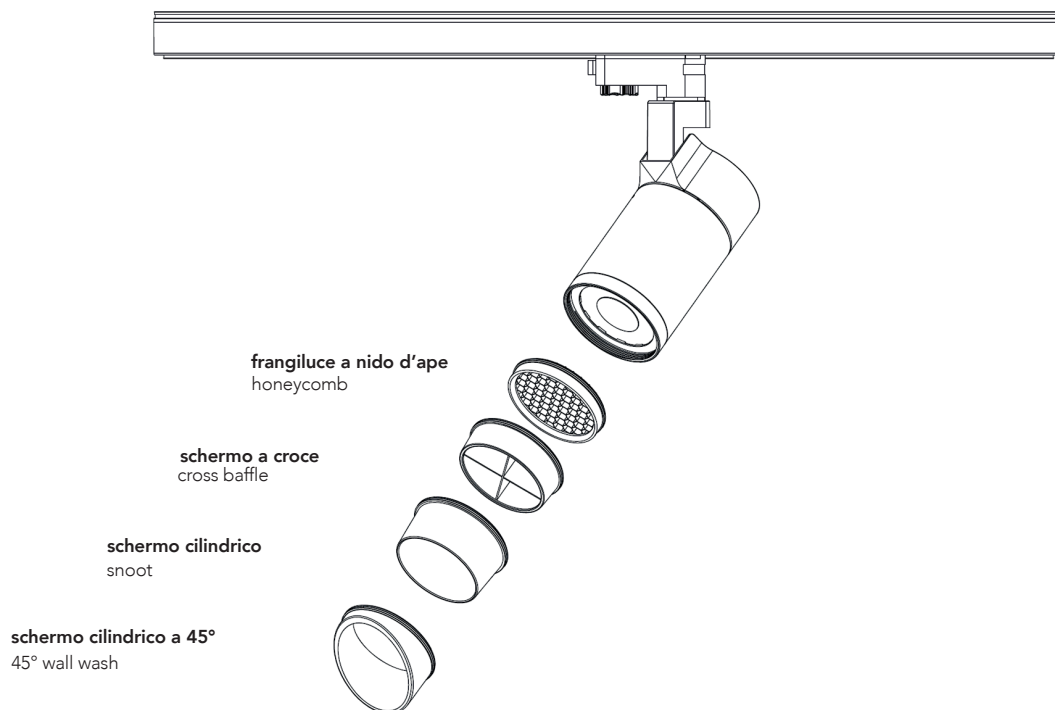

**frangiluce a nido d'ape**  
*honeycomb*

181.0010.01 1 pc



**schermo a croce**  
*cross baffle*

181.0010.02 1 pc



**schermo cilindrico**  
*snoot*

181.0010.03 1 pc



**schermo cilindrico a 45°**  
*45° wall wash*

181.0010.04 1 pc

