


Squa IP44 - LED

CONFIGURA ONLINE
macrolux.store

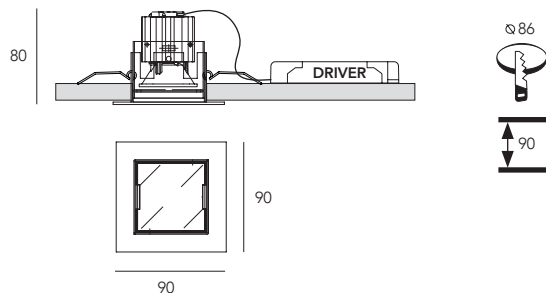

Squa 50 Ip44, led 6w

IP 44

Apparecchio ad incasso LED con cornice, completo di alimentatore e connessioni, tolleranza colore 3 McAdams, gradi di emissione 20° (spot) oppure 40° (flood).

Recessed LED fixture with frame, complete with driver and connections, colour tolerance 3 McAdams, emission degrees 20° (spot) or 40° (flood).

1917.0101.01.20-- 2 4 14
6w, 3000°K, 615lm, 102,5lm/w, CRI>90,



1917.0101.01.40-- 2 4 14
6w, 3000°K, 615lm, 102,5lm/w, CRI>90,



cod. 1917.0101.01.2700.**-- per 2700°K
cod. 1917.0101.01.4000.**-- per 4000°K

Squa 50 ip44, spot led without driver

IP 44

Driver da aggiungere separatamente.
Drivers to be added separately.

1917.0101.03.(°K).(X°)-- 2 4 14
Max 6w, CRI>90, max 350mA,



2 nero
black

4 bianco
white

14 grigio argento
silvery grey