



TRATTO IP 65

Descrizione tecnica:

Sistema di illuminazione flessibile 48v, emissione di luce indiretta orientabile.
 Kit comprensivo di parte strutturale, fettuccia metallica L.25 m, bobine Led da 5 m, connettori di collegamento wire-board e board-board e liquido isolante IP65.
 Alimentatore escluso, installazione in remoto. Cesoia per taglio fettuccia esclusa.
 Le strip led possono essere sezionate ad interasse prefissato di 25 mm.

Installazione:

Tratto può essere teso orizzontalmente con installazione da parete a parete, in diagonale con inclinazione massima di 30° oppure con installazione a soffitto, teso verticalmente da soffitto a pavimento.

Dimensioni:

TRATTO IP 65

L. 5.00 / 10.00 / 15.00 / 20.00 m
 Fettuccia metallo H. 15 mm L.25 m


Colore:




TRATTO IP 65 3000°K
 TRATTO IP 65 STRIP LED 48V 12 W/m 3000°K 1350 Lm/m CRI>80

TRATTO IP 65 2700°K
 TRATTO IP 65 STRIP LED 48V 12 W/m 2700°K 1330 Lm/m CRI>80

Disponibile con driver ON/OFF/ PUSH 1-10 v / DALI.

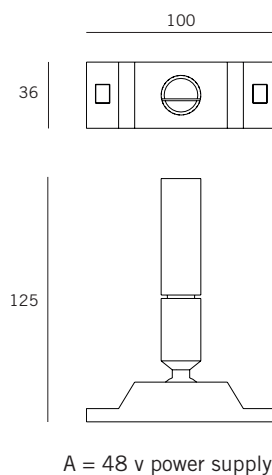

TRATTO IP 65

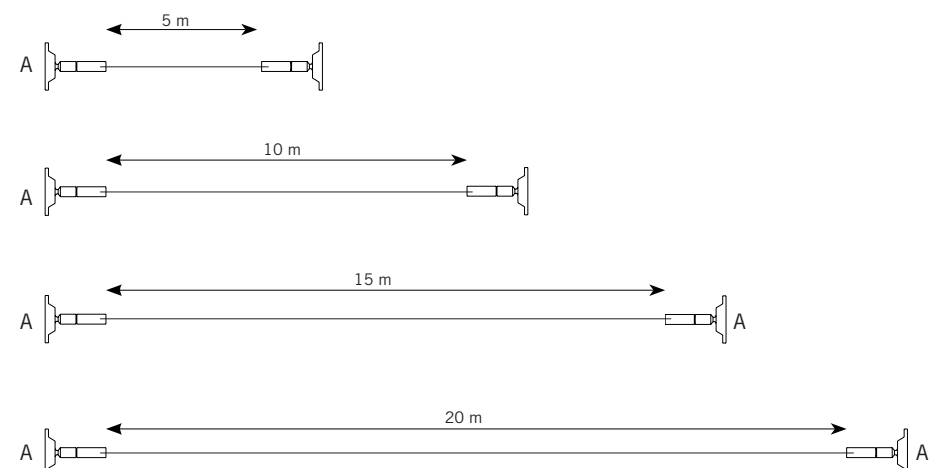

Technical product sheet

Progetto Mad designers 2023

MACROLUX

MACROLUX s.r.l. 31020 San Vendemiano Treviso - Italia Via Padania, 67/69 t. +39 0438 470773 p. iva 03547130264 www.macrolux.it



TRATTO IP 65

Technical description:

Flexible 48v lighting system, adjustable indirect light emission.
Kit inclusive of structural part, metal strip L.25 m, 5 m LED coils, wire-board and board-board connection connectors and IP65 insulating liquid.
Power supply excluded, remote installation. Shear for cutting webbing excluded.
The LED strips cutting unit 25 mm.

Installation:

Tratto can be stretched horizontally with wall-to-wall installation, diagonally with a maximum inclination of 30° or with ceiling installation, stretched vertically from ceiling to floor.

Dimension:

TRATTO IP 65

L. 5.00 / 10.00 / 15.00 / 20.00 m
Metal webbing H. 15 mm L.25 m


Color:



TRATTO IP 65 3000°K
TRATTO IP 65 STRIP LED 48V 12 W/m 3000°K 1350 Lm/m CRI>80

TRATTO IP 65 2700°K
TRATTO IP 65 STRIP LED 48V 12 W/m 2700°K 1330 Lm/m CRI>80

Available driver ON/OFF/ PUSH 1-10 v / DALI.

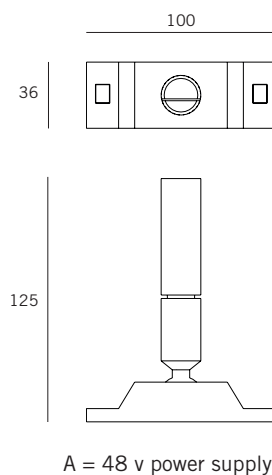

TRATTO IP 65

