

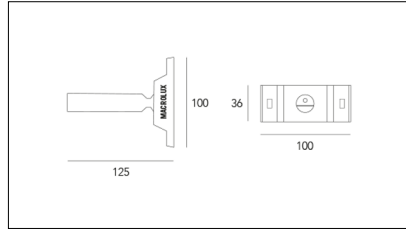



MACROLUX




Article code	Article	Colour	Light Temperature (°K)	Watt (W)	Length (mm)
201.0005.2	TRATTO/5M/IP65/3000°K-2	Black (2)	3000	60	5000
201.0005.2700.2	TRATTO/5M/IP65/2700°K-2	Black (2)	2700	60	5000
201.0010.2	TRATTO/10M/IP65/3000°K-2	Black (2)	3000	120	10000
201.0010.2700.2	TRATTO/10M/IP65/2700°K-2	Black (2)	2700	120	10000
201.0015.2	TRATTO/15M/IP65/3000°K-2	Black (2)	3000	180	15000
201.0015.2700.2	TRATTO/15M/IP65/2700°K-2	Black (2)	2700	180	15000
201.0020.2	TRATTO/20M/IP65/3000°K-2	Black (2)	3000	240	20000
201.0020.2700.2	TRATTO/20M/IP65/2700°K-2	Black (2)	2700	240	20000




Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	
1324.0000.10	STRIP LED/Primer monouso 0,66 ml - 10 PZ	




Article code	Name	Description	Watt (W)	Driver's type
1.048075	Driver Constant Voltage 77W/48V IP67	Driver Costant Voltage 48V: 200-305V/76.8W I 100-180V/60W	77	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.048150	Driver Constant Voltage 150W/48V IP67	Driver Costant Voltage 48V: 200-305V/150W 100-180V/105W	150	On/Off



Article code	Name	Description	Watt (W)	Driver's type
1.048075DA	Driver Constant Voltage 75W/48V IP67 DALI		75	DALI



Article code	Name	Description	Watt (W)	Driver's type
1.048150DA	Driver Constant Voltage 150W/48V IP67 DALI		150	DALI 2




Article code	Name	Description	Watt (W)	Driver's type
1.28001044	Driver LCU 48V 150W DC-STR DIM SR	Driver 48V 150W IP20 dimmerabile DALI/PUSH	150	DALI 2




Article code	Name	Description
1.1335.0001	[STRIP LED 10MM] Connettore WIRE/BOARD	Connettore "Wire to Board" - Compatibile solo con Strip led 10mm IP20/IP65-NANO



Article code	Name	Description
1.1335.0002	[STRIP LED 10MM] Connettore BOARD/BOARD	Connettore "Board to Board" - Compatibile solo con Strip led 10mm IP20/IP65-NANO



Article code	Name	Description
201.0000	TRATTO/FORBICE	



Article code	Name	Description	Watt (W)	Driver's type
1.28001233	Driver LCU 48V 75W DC-STR DIM SR	Driver 48V 75W IP20 dimmerabile DALI/PUSH - Dimensioni 100 x 31 x 235 mm	75	DALI - PUSH