


# Virgo 60 Spot ML\_30 | Groove

CONFIGURA ONLINE  
macrolux.store

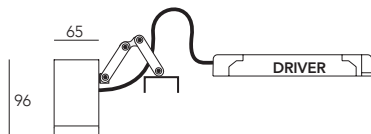

Non installabile in modalità uplight.  
(Fascio luminoso verso l'alto.)  
Can not be mounted uplight mode.  
(Light beam upwards.)

## Spot virgo 60 led



Spot a LED, completo di alimentatore e connessioni, tolleranza colore 3 McAdams, 20° (spot) oppure 40° (flood), orientabilità +/- 90°.

LED spot, complete with driver and connections, 3000°K, colour tolerance 3 McAdams, 20° (spot) or 40° (flood), adjustable +/- 90°.

8 nero texturizzato  
texturized black

11 bianco texturizzato  
texturized white

1312.0030.13.20.-- 8 11

9w, 3000°K, 1025lm, 114lm/w, CRI>90,



1312.0030.13.34.-- 8 11

9w, 3000°K, 1025lm, 114lm/w, CRI>90,



cod. 1312.0030.13.2700.(X°).-- per 2700°K

cod. 1312.0030.13.4000.(X°).-- per 4000°K

## Spot virgo 60, 9w DALI



1312.0030.13.08.(°K).(X°).--

9w, 1025lm, 114lm/w, CRI>90,

## Spot led without driver to customize



Driver da aggiungere separatamente.

Driver to be added separately.

1312.0030.15.20.-- 8 11

9w, 3000°K, 1025lm, 114lm/w, CRI>90, max 500mA



1312.0030.15.34.-- 8 11

9w, 3000°K, 1025lm, 114lm/w, CRI>90, max 500mA

