

**UGR<19**  
lens medium 60°

Peso / Weight 1,73 kg/m

## Worklife, suspension



**92** nero opaco  
matt black

**94** bianco opaco  
matt white

Apparecchio a sospensione con ottiche differenti per adattarsi ad ogni ambiente e garantire un ottimo comfort visivo. Alta efficienza 96%

*Suspended luminaire with different optics to adapt to any environment and guarantee excellent visual comfort. High efficiency 96%.*


**2212.1145.01.07.--** 92 94 lens medium 60° (07)  
L=1145, 24,2w, 3000°K, 3810 lm, CRI>80, IP40,

**2212.1704.01.07.--** 92 94 lens medium 60° (07)  
L=1704, 36,3w, 3000°K, 5715 lm, CRI>80, IP40,

**2212.2263.01.07.--** 92 94 lens medium 60° (07)  
L=2263, 48,4w, 3000°K, 7620 lm, CRI>80, IP40,

**2212.2822.01.07.--** 92 94 lens medium 60° (07)  
L=2822, 60,5w, 3000°K, 9525 lm, CRI>80, IP40,  
cod. 2212.L.01.4000.07.-- per 4000°K

## Worklife, suspension DALI





**2212.1145.02.07.--** 92 94 lens medium 60° (07)  
L=1145, 24,2w, 3000°K, 3810 lm, CRI>80, IP40,

**2212.1704.02.07.--** 92 94 lens medium 60° (07)  
L=1704, 36,3w, 3000°K, 5715 lm, CRI>80, IP40,

**2212.2263.02.07.--** 92 94 lens medium 60° (07)  
L=2263, 48,4w, 3000°K, 7620 lm, CRI>80, IP40,

**2212.2822.02.07.--** 92 94 lens medium 60° (07)  
L=2822, 60,5w, 3000°K, 9525 lm, CRI>80, IP40,  
cod. 2212.L.01.4000.07.-- per 4000°K



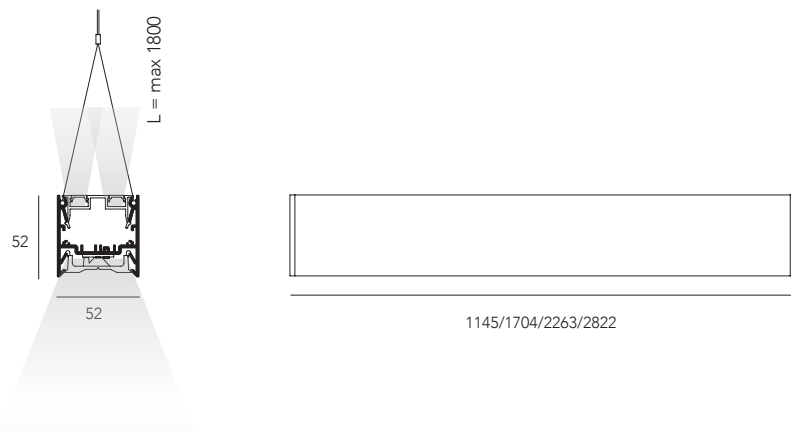

**UGR<19**  
lens medium 60°

Peso / Weight 1,73 kg/m

## Worklife biemission, suspension



Apparecchio a sospensione con ottiche differenti per adattarsi ad ogni ambiente e garantire un ottimo comfort visivo. Alta efficienza 96%  
*Suspended luminaire with different optics to adapt to any environment and guarantee excellent visual comfort. High efficiency 96%.*

**2213.1145.01.07.--** 92 94 lens medium 60° (07)  
L=1145, 45w, 3000°K, 2640 lm-UP, 3810 lm-DOWN CRI>90, IP40,

**2213.1704.01.07.--** 92 94 lens medium 60° (07)  
L=1704, 69w, 3000°K, 4080 lm-UP, 5715 lm-DOWN, CRI>90, IP40,

**2213.2263.01.07.--** 92 94 lens medium 60° (07)  
L=2263, 92w, 3000°K, 5400 lm-UP, 7620 lm-DOWN, CRI>90, IP40,

**2213.2822.01.07.--** 92 94 lens medium 60° (07)  
L=2822, 114w, 3000°K, 6720 lm-UP, 9525 lm-DOWN, CRI>90, IP40,

cod. 2213.L.01.4000.07.-- per 4000°K

**92** nero opaco  
matt black

**94** bianco opaco  
matt white

## Worklife biemission, suspension DALI



**2213.1145.08.07.--** 92 94 lens medium 60° (07)  
L=1145, 45w, 3000°K, 2640 lm-UP, 3810 lm-DOWN CRI>90, IP40, DALI

**2213.1704.08.07.--** 92 94 lens medium 60° (07)  
L=1704, 69w, 3000°K, 4080 lm-UP, 5715 lm-DOWN, CRI>90, IP40, DALI

**2213.2263.08.07.--** 92 94 lens medium 60° (07)  
L=2263, 92w, 3000°K, 5400 lm-UP, 7620 lm-DOWN, CRI>90, IP40, DALI

**2213.2822.08.07.--** 92 94 lens medium 60° (07)  
L=2822, 114w, 3000°K, 6720 lm-UP, 9525 lm-DOWN, CRI>90, IP40, DALI

cod. 2213.L.08.4000.07.-- per 4000°K

