


Worklife ceiling

CONFIGURA ONLINE
macrolux.store

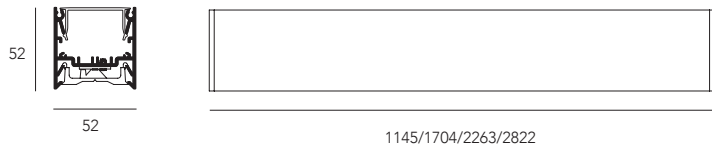

Peso / Weight 1,73 kg/m

UGR<19
lens medium 60°

Worklife, ceiling



Apparecchio a soffitto con ottiche differenti per adattarsi ad ogni ambiente e garantire un ottimo comfort visivo. Alta efficienza 96%

Ceiling luminaire with different optics to adapt to any environment and guarantee excellent visual comfort. High efficiency 96%.

92 nero opaco
matt black

94 bianco opaco
matt white

2211.1145.01.07.-- 92 94 lens medium 60° (07)

L=1145, 24,2w, 3000°K, 3810 lm-DOWN CRI>90, IP40,

2211.1704.01.07.-- 92 94 lens medium 60° (07)

L=1704, 36,3w, 3000°K, 5715 lm-DOWN, CRI>90, IP40,


2211.2263.01.07.-- 92 94 lens medium 60° (07)

L=2263, 48,4w, 3000°K, 7620 lm-DOWN, CRI>90, IP40,

2211.2822.01.07.-- 92 94 lens medium 60° (07)

L=2822, 60,5w, 3000°K, 9525 lm-DOWN, CRI>90, IP40,

cod. 2213.L.01.07.-- per 4000°K



Worklife, ceiling DALI



2211.1145.08.07.-- 92 94 lens medium 60° (07)

L=1145, 24,2w, 3000°K, 3810 lm-DOWN CRI>90, IP40, , DALI

2211.1704.08.07.-- 92 94 lens medium 60° (07)

L=1704, 36,3w, 3000°K, 5715 lm-DOWN, CRI>90, IP40, , DALI

2211.2263.08.07.-- 92 94 lens medium 60° (07)

L=2263, 48,4w, 3000°K, 7620 lm-DOWN, CRI>90, IP40, , DALI

2211.2822.08.07.-- 92 94 lens medium 60° (07)

L=2822, 60,5w, 3000°K, 9525 lm-DOWN, CRI>90, IP40, , DALI

cod. 2213.L.01.07.-- per 4000°K