


# Zero spot 160

CONFIGURA ONLINE  
macrolux.store



## Spot zero 160 led

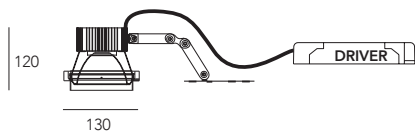

2 nero opaco  
matt black

Proiettore LED, completo di alimentatore e connessioni, tolleranza colore 3 McAdams.

LED projector, complete with driver and connections, colour tolerance 3 McAdams,

**265.0061.01.16--** 2  
12w, 3000°K, 1835lm, 153lm/w, CRI>95,



**265.0061.01.32--** 2  
12w, 3000°K, 1835lm, 153lm/w, CRI>95,



**265.0061.02.16--** 2  
17w, 3000°K, 2500lm, 147lm/w, CRI>95,



**265.0061.02.32--** 2  
17w, 3000°K, 2500lm, 147lm/w, CRI>95,



cod. 265.0061.\*\*.2700.(X°).-- per 2700°K  
cod. 265.0061.\*\*.4000.(X°).-- per 4000°K

## Spot zero 160, 17w DALI



**265.0061.08.(°K).(X°).--**  
17w, 3000°K, 2500lm, 147lm/w, CRI>90,

## spot led without driver to customize

Driver da aggiungere separatamente.  
Driver to be added separately.



**265.0061.03.16--** 2  
17w, 3000°K, 2500lm, max 500mA, 147lm/w, CRI>95



**265.0061.03.32--** 2  
17w, 3000°K, 2500lm, max 500mA, 147lm/w, CRI>95

