

MACROLUX



ma2_10

Profiles - Perimeter

Colour: Black (92) | White (94)
Light Temperature (°K): 2700 | 3000 | 4000
Watt (W): 9,6
Luminous flux (lm): 900
Luminous efficiency (lm/w): 94
Energetic class: A++

CRI (Color Rendering): >90
IP: 40
Class: Class III
Volts (Out): 24V
Pieces: 1 | 15
Length (mm): 3000



Conforms to European directives



Conforms to the ROHS directive



Insulation class




Type of disposal




Protection index



Operating voltage (Out)

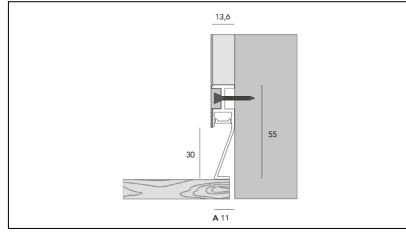

Article code	Article	Colour	Light Temperature (°K)	Watt (W)	Length (mm)
1301.0210.00.92	MA2_10-92 L=max 3 m	Black (92)			
1301.0210.01.92	MA2_10/3000-92 L=3m - EMPTY STANDARD	Black (92)			3000
1301.0210.01.M15.92	MA2_10/3000-92 L=3m - 15x EMPTY STANDARD	Black (92)			3000
1301.0210.120.2700.92	MA2_10/9,6W/2700°K-92	Black (92)	2700	9,6	
1301.0210.120.4000.92	MA2_10/9,6W/4000°K-92	Black (92)	4000	9,6	
1301.0210.120.92	MA2_10/9,6W/3000°K-92	Black (92)	3000	9,6	

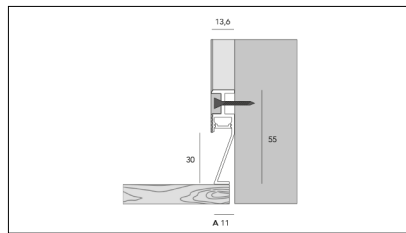

Article code	Article	Colour	Light Temperature (°K)	Watt (W)	Length (mm)
1301.0210.00.94	MA2_10-94 L=max 3 m	White (94)			
1301.0210.01.94	MA2_10/3000-94 L=3m - EMPTY STANDARD	White (94)			3000
1301.0210.01.M15.94	MA2_10/3000-94 L=3m - 15x EMPTY STANDARD	White (94)			3000
1301.0210.120.2700.94	MA2_10/9,6W/2700°K-94	White (94)	2700	9,6	
1301.0210.120.4000.94	MA2_10/9,6W/4000°K-94	White (94)	4000	9,6	
1301.0210.120.94	MA2_10/9,6W/3000°K-94	White (94)	3000	9,6	