

# MACROLUX

mt2\_27


Profiles - recessed




Colour: White (94)  
Light Temperature (°K): 2700 | 3000 | 4000  
Watt (W): 9,6 | 19,6  
Luminous flux (lm): 1020 | 1130 | 1210 | 2030 | 2240 | 2380  
CRI (Color Rendering): >90


IP: 40  
Class: Class III  
Volts (Out): 24V  
Pieces: 1 | 10  
Length (mm): 3000

 Conforms to European directives


 Conforms to the ROHS directive



 Insulation class




 Equipment

 Type of disposal


 Protection index

 Operating voltage (Out)

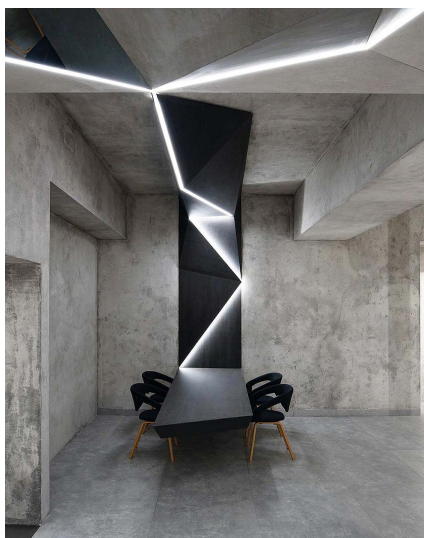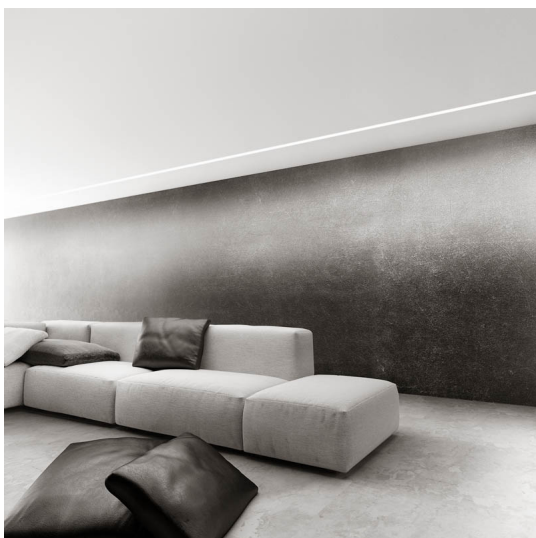


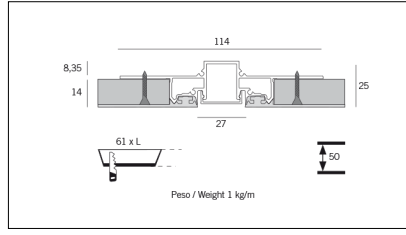


Article code	Article	Colour	Light Temperature (°K)	Watt (W)	Length (mm)
1320.0227.00.94	MT2_27-94 L=max 3 m	White (94)			
1320.0227.01.94	MT2_27/3000-94 L=3m - EMPTY STANDARD	White (94)			3000
1320.0227.01.M10.94	MT2_27/3000-94 L=3m - 10x EMPTY STANDARD	White (94)			3000
1320.0227.120.2700.94	MT2_27/9.6W/2700°K-94	White (94)	2700	9,6	
1320.0227.120.4000.94	MT2_27/9.6W/4000°K-94	White (94)	4000	9,6	
1320.0227.120.94	MT2_27/9.6W/3000°K-94	White (94)	3000	9,6	
1320.0227.240.2700.94	MT2_27/19.6W/2700°K-94	White (94)	2700	19,6	
1320.0227.240.4000.94	MT2_27/18,5W/4000°K-94	White (94)	4000	19,6	
1320.0227.240.94	MT2_27/19.6W/3000°K-94	White (94)	3000	19,6	



Article code	Name	Description
1312.1030	ML_30/GL	Staffe di giunzione lineare - Compatibile con ML_30, MT2_27 e MX2_27
1312.1030.10	ML_30/GL - 10 PZ	Staffe di giunzione lineare - Compatibile con ML_30, MT2_27 e MX2_27




Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	
1324.0000.10	STRIP LED/Primer monouso 0,66 ml - 10 PZ	




Article code	Name	Description	Watt (W)	Driver's type
1.024015	Driver LED 24V 15W IP20	Dimensioni 45 x 19 x 123 mm	15	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024020	Driver LED 24V 20W IP20	Dimensioni 36 x 16 x 103 mm	20	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024030	Driver LED 24V 30W IP20	Dimensioni 50 x 17 x 156 mm	30	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024050	Driver LED 24V 50W IP20	Dimensioni 59 x 29 x 167 mm	50	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024075	Driver LED 24V 75W IP20	Dimensioni 61 x 29 x 184 mm	75	On/Off



Article code	Name	Description	Watt (W)
1.97759	Driver LED 24V 150W IP67	Dimensioni 69 x 37 x 206 mm	150



Article code	Name	Description	Watt (W)
1.97745	Driver LED 24V 200W IP67	Dimensioni 69 x 37 x 206 mm	200



Article code	Name	Description
1320.2227	MT2_27/G090 (Solo taglio)	Taglio ad angolo orizzontale 90° / horizontal corner's cut 90°

200 x 200


Powered by HTML.COM

Article code	Name	Description
1320.3227	MT2_27/GV90 (Solo taglio)	Taglio ad angolo verticale 90° / Vertical corner's cut 90°


200 x 200

Powered by HTML.COM


Article code	Name	Description
1320.4227	MT2_27/GV270 (Solo taglio)	Taglio ad angolo verticale 270° / Vertical corner's cut 270°




Article code	Name	Description	Colour
1320.5227.94	MT2_27/TC-4	Testata di chiusura, finitura bianco / End cap, finishing white	White (94)
1320.5227.94.10	MT2_27/TC-4 - 10 PZ	Testata di chiusura, finitura bianco / End cap, finishing white	White (94)




Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.300	MKT_27/300/7,5W/3000°K	Profilo alluminio L=300 mm 7,5W 24V 950lm 3000°K CRI>90 - Driver escluso	7,5	3000	300




Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.600	MKT_27/600/15W/3000°K	Profilo alluminio L=600 mm 15W 24V 1900lm 3000°K CRI>90 - Driver escluso	15	3000	600



Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.900	MKT_27/900/22,5W/3000°K	Profilo alluminio L=900 mm 22,5W 24V 2850lm 3000°K CRI>90 - Driver escluso	22,5	3000	900




Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.1200	MKT_27/1200/30W/3000°K	Profilo alluminio L=1200 mm 30W 24V 3800lm 3000°K CRI>90 - Driver escluso	30	3000	1200




Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.1500	MKT_27/1500/37,5W/3000°K	Profilo alluminio L=1500 mm 37,5W 24V 4750lm 3000°K CRI>90 - Driver escluso	37.5	3000	1500



Article code	Name	Description	Length (mm)
1310.27.00	MKT_27/CA	Cavo 24V di alimentazione L=500 mm	500



Article code	Name	Description
1324.7227.1	M2_27/KEY	Chiave per fissaggio per MA2_35, MX2_27 e MT2_27



Article code	Name	Description
1324.9227.01	M2_27/Diffusore Opale L=3m - EMPTY STANDARD	Profilo PC Opale / Compatibile con MX2_27 e MT2_27 - Senza taglio a misura