

MACROLUX



mt3_27

Profiles - Wall

Colour: Black (92) | White (94) | Grey anodize (98)

Diffuser: Opal | Prismatic

Light Temperature (°K): 2700 | 3000 | 4000

Watt (W): 7,5 | 15 | 90 | 37,5 | 9,6 | 19,6 | 3,5 | 30

Luminous flux (lm): 950 | 1900 | 2850 | 4750 | 1020 | 1130 | 1210 | 2030 |

2240 | 2380 | 3800

Energetic class: A+

CRI (Color Rendering): >90

IP: 40

Class: Class III

Volts (Out): 24V

Pieces: 1 | 10

Length (mm): 320 | 620 | 920 | 1520 | 3000 | 1220



Conforms to European directives



Conforms to the ROHS directive



Insulation class



Equipment



Type of disposal





Protection index





Operating voltage (Out)




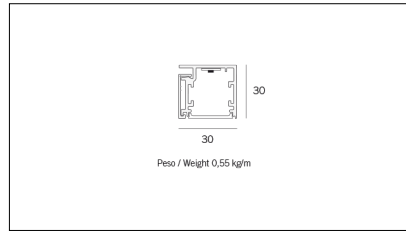


Article code	Article	Colour	Diffuser	Length (mm)	Light Temperature (°K)	Watt (W)
1320.0327.00.98	MT3_27/DO-98 L=max 3 m	Grey anodize (98)	Opal			
1320.0327.01.98	MT3_27/DO/3000-98 L=3m - EMPTY STANDARD	Grey anodize (98)	Opal	3000		
1320.0327.01.M10.98	MT3_27/DO/3000-98 L=3M - 10x EMPTY STANDARD	Grey anodize (98)	Opal	3000		
1320.0327.240.2700.98	MT3_27/19.6W/2700°K-98	Grey anodize (98)	Opal		2700	19,6
1320.0327.240.4000.98	MT3_27/18,5W/4000°K-98	Grey anodize (98)	Opal		4000	19,6
1320.0327.240.98	MT3_27/18,5W/3000°K-98	Grey anodize (98)	Opal		3000	19,6
1320.0327.K1200.2700.98	*MT3_27	Grey anodize (98)	Opal	1220	2700	3,5
1320.0327.K1200.4000.98	*MT3_27	Grey anodize (98)	Opal	1220	4000	3,5
1320.0327.K1200.98	*MT3_27	Grey anodize (98)	Opal	1220	3000	30
1320.0327.K1500.2700.98	*MT3_27	Grey anodize (98)	Opal	1520	2700	37,5
1320.0327.K1500.4000.98	*MT3_27	Grey anodize (98)	Opal	1520	4000	37,5
1320.0327.K1500.98	*MT3_27	Grey anodize (98)	Opal	1520	3000	37,5
1320.0327.K300.2700.98	*MT3_27	Grey anodize (98)	Opal	320	2700	7,5
1320.0327.K300.4000.98	*MT3_27	Grey anodize (98)	Opal	320	4000	7,5
1320.0327.K300.98	*MT3_27	Grey anodize (98)	Opal	320	3000	7,5
1320.0327.K600.2700.98	*MT3_27	Grey anodize (98)	Opal	620	2700	15
1320.0327.K600.4000.98	*MT3_27	Grey anodize (98)	Opal	620	4000	15
1320.0327.K600.98	*MT3_27	Grey anodize (98)	Opal	620	3000	15
1320.0327.K900.2700.98	*MT3_27	Grey anodize (98)	Opal	920	2700	90
1320.0327.K900.4000.98	*MT3_27	Grey anodize (98)	Opal	920	4000	90
1320.0327.K900.98	*MT3_27	Grey anodize (98)	Opal	920	3000	90
1320.03279.01.98	MT3_27/DP/3000-98 L=3m - EMPTY STANDARD	Grey anodize (98)	Prismatic	3000		
1320.03279.01.M10.98	MT3_27/DP/3000-98 L=3M - 10x EMPTY STANDARD	Grey anodize (98)	Prismatic	3000		

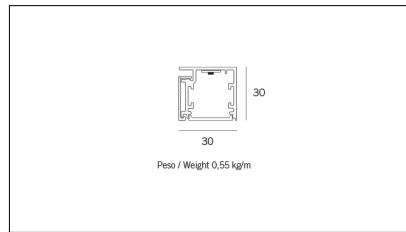


Article code	Article	Colour	Diffuser	Light Temperature (°K)	Watt (W)	Length (mm)
1320.0327.00.92	MT3_27-92 L=max 3 m	Black (92)	Opal			
1320.0327.01.92	MT3_27/DO/3000-92 L=3m - EMPTY STANDARD	Black (92)	Opal			3000
1320.0327.01.M10.92	MT3_27/DO/3000-92 L=3M - 10x EMPTY STANDARD	Black (92)	Opal			3000
1320.0327.120.2700.92	MT3_27/9,6W/2700°K-92	Black (92)	Opal	2700	9,6	
1320.0327.120.4000.92	MT3_27/9,6W/4000°K-92	Black (92)	Opal	4000	9,6	
1320.0327.120.92	MT3_27/9,6W/3000°K-92	Black (92)	Opal	3000	9,6	
1320.0327.240.2700.92	MT3_27/19.6W/2700°K-92	Black (92)	Opal	2700	19,6	
1320.0327.240.4000.92	MT3_27/18,5W/4000°K-92	Black (92)	Opal	4000	19,6	
1320.0327.240.92	MT3_27/19.6W/3000°K-92	Black (92)	Opal	3000	19,6	
1320.0327.K1200.2700.92	*MT3_27	Black (92)	Opal	2700	3,5	1220
1320.0327.K1200.4000.92	*MT3_27	Black (92)	Opal	4000	3,5	1220
1320.0327.K1200.92	*MT3_27	Black (92)	Opal	3000	30	1220
1320.0327.K1500.2700.92	*MT3_27	Black (92)	Opal	2700	37,5	1520
1320.0327.K1500.4000.92	*MT3_27	Black (92)	Opal	4000	37,5	1520
1320.0327.K1500.92	*MT3_27	Black (92)	Opal	3000	37,5	1520
1320.0327.K300.2700.92	*MT3_27	Black (92)	Opal	2700	7,5	320


Article code	Article	Colour	Diffuser	Light Temperature (°K)	Watt (W)	Length (mm)
1320.0327.K300.4000.92	*MT3_27	Black (92)	Opal	4000	7,5	320
1320.0327.K300.92	*MT3_27	Black (92)	Opal	3000	7,5	320
1320.0327.K600.2700.92	*MT3_27	Black (92)	Opal	2700	15	620
1320.0327.K600.4000.92	*MT3_27	Black (92)	Opal	4000	15	620
1320.0327.K600.92	*MT3_27	Black (92)	Opal	3000	15	620
1320.0327.K900.2700.92	*MT3_27	Black (92)	Opal	2700	90	920
1320.0327.K900.4000.92	*MT3_27	Black (92)	Opal	4000	90	920
1320.0327.K900.92	*MT3_27	Black (92)	Opal	3000	90	920
1320.03279.01.92	MT3_27/DP/3000-92 L=3m - EMPTY STANDARD	Black (92)	Prismatic			3000
1320.03279.01.M10.92	MT3_27/DP/3000-92 L=3M - 10x EMPTY STANDARD	Black (92)	Prismatic			3000

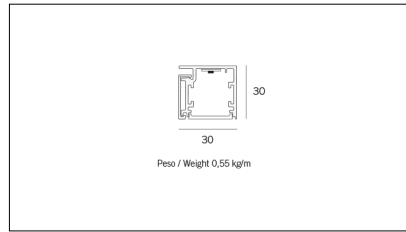


Article code	Article	Colour	Diffuser	Light Temperature (°K)	Watt (W)	Length (mm)
1320.0327.00.94	MT3_27-94 L=max 3 m	White (94)	Opal			
1320.0327.01.94	MT3_27/DO/3000-94 L=3m - EMPTY STANDARD	White (94)	Opal			3000
1320.0327.01.M10.94	MT3_27/DO/3000-94 L=3M - 10x EMPTY STANDARD	White (94)	Opal			3000
1320.0327.120.2700.94	MT3_27/9,6W/2700°K-94	White (94)	Opal	2700	9,6	
1320.0327.120.4000.94	MT3_27/DO/9,6W/4000°K-94	White (94)	Opal	4000	9,6	
1320.0327.120.94	MT3_27/9,6W/3000°K-94	White (94)	Opal	3000	9,6	
1320.0327.240.2700.94	MT3_27/19.6W/2700°K-94	White (94)	Opal	2700	19,6	
1320.0327.240.4000.94	MT3_27/18,5W/4000°K-94	White (94)	Opal	4000	19,6	
1320.0327.240.94	MT3_27/19.6W/3000°K-94	White (94)	Opal	3000	19,6	
1320.0327.K1200.2700.94	*MT3_27	White (94)	Opal	2700	3,5	1220
1320.0327.K1200.4000.94	*MT3_27	White (94)	Opal	4000	3,5	1220
1320.0327.K1200.94	MT3_27/1220/30W/3000°K-94	White (94)	Opal	3000	30	1220
1320.0327.K1500.2700.94	*MT3_27	White (94)	Opal	2700	37,5	1520
1320.0327.K1500.4000.94	*MT3_27	White (94)	Opal	4000	37,5	1520
1320.0327.K1500.94	MT3_27/1520/37.5W/3000°K-94	White (94)	Opal	3000	37,5	1520
1320.0327.K300.2700.94	*MT3_27	White (94)	Opal	2700	7,5	320
1320.0327.K300.4000.94	*MT3_27	White (94)	Opal	4000	7,5	320
1320.0327.K300.94	*MT3_27	White (94)	Opal	3000	7,5	320
1320.0327.K600.2700.94	*MT3_27	White (94)	Opal	2700	15	620
1320.0327.K600.4000.94	*MT3_27	White (94)	Opal	4000	15	620
1320.0327.K600.94	MT3_27/620/15W/3000°K-94	White (94)	Opal	3000	15	620
1320.0327.K900.2700.94	*MT3_27	White (94)	Opal	2700	90	920
1320.0327.K900.4000.94	*MT3_27	White (94)	Opal	4000	90	920
1320.0327.K900.94	MT3_27/920/22.5W/3000°K-94	White (94)	Opal	3000	90	920
1320.03279.01.94	MT3_27/DP/3000-94 L=3m - EMPTY STANDARD	White (94)	Prismatic			3000
1320.03279.01.M10.94	MT3_27/DP/3000-94 L=3M - 10x EMPTY STANDARD	White (94)	Prismatic			3000




Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	
1324.0000.10	STRIP LED/Primer monouso 0,66 ml - 10 PZ	




Article code	Name	Description	Watt (W)	Driver's type
1.024015	Driver LED 24V 15W IP20	Dimensioni 45 x 19 x 123 mm	15	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024020	Driver LED 24V 20W IP20	Dimensioni 36 x 16 x 103 mm	20	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024030	Driver LED 24V 30W IP20	Dimensioni 50 x 17 x 156 mm	30	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024050	Driver LED 24V 50W IP20	Dimensioni 59 x 29 x 167 mm	50	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024075	Driver LED 24V 75W IP20	Dimensioni 61 x 29 x 184 mm	75	On/Off




Article code	Name	Description	Watt (W)
1.97759	Driver LED 24V 150W IP67	Dimensioni 69 x 37 x 206 mm	150




Article code	Name	Description	Watt (W)
1.97745	Driver LED 24V 200W IP67	Dimensioni 69 x 37 x 206 mm	200




Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.300	MKT_27/300/7,5W/3000°K	Profilo alluminio L=300 mm 7,5W 24V 950lm 3000°K CRI>90 - Driver escluso	7,5	3000	300




Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.600	MKT_27/600/15W/3000°K	Profilo alluminio L=600 mm 15W 24V 1900lm 3000°K CRI>90 - Driver escluso	15	3000	600



Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.900	MKT_27/900/22,5W/3000°K	Profilo alluminio L=900 mm 22,5W 24V 2850lm 3000°K CRI>90 - Driver escluso	22.5	3000	900




Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.1200	MKT_27/1200/30W/3000°K	Profilo alluminio L=1200 mm 30W 24V 3800lm 3000°K CRI>90 - Driver escluso	30	3000	1200




Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.1500	MKT_27/1500/37,5W/3000°K	Profilo alluminio L=1500 mm 37,5W 24V 4750lm 3000°K CRI>90 - Driver escluso	37.5	3000	1500




Article code	Name	Description	Length (mm)
1310.27.00	MKT_27/CA	Cavo 24V di alimentazione L=500 mm	500




Article code	Name	Description	Colour
1320.5327.98	MT3_27/TC-98	Testata di chiusura, finitura grigio alluminio/ End cap, finishing grey aluminium	Grey anodize (98)
1320.5327.98.10	MT3_27/TC-98 - 10 PZ	Testata di chiusura, finitura grigio alluminio/ End cap, finishing grey aluminium	Grey anodize (98)




Article code	Name	Description	Colour
1320.5327.94	MT3_27/TC-4	Testata di chiusura, finitura bianco / End cap, finishing white (1 pz.)	White (94)
1320.5327.94.10	MT3_27/TC-4 - 10 PZ	Testata di chiusura, finitura bianco / End cap, finishing white	White (94)



Article code	Name	Description	Colour
1320.5327.92	MT3_27/TC-2	Testata di chiusura, finitura nero / End cap, finishing black (1 pz.)	Black (92)
1320.5327.92.10	MT3_27/TC-2 - 10 PZ	Testata di chiusura, finitura nero / End cap, finishing nero	Black (92)



Article code	Name	Description
1324.9127.01	M_27/Diffusore Opale L=3m - EMPTY STANDARD	Profilo PC Opale / Compatibile con MX0_27, MT1_27, MT3_27 - Senza taglio a misura



Article code	Name	Description
1324.91279.01	M_27/Diffusore Prismaticizzato L=3m - EMPTY STANDARD	Profilo PC Prismaticizzato / Compatibile con MX0_27, MT1_27, MT3_27 - Senza taglio a misura