

MACROLUX

mx2_45

Profiles - recessed



Colour: White (94)
Light Temperature (°K): 2700 | 3000 | 4000
Watt (W): 9.6 | 19.6
Luminous flux (lm): 900 | 2240
Luminous efficiency (lm/w): 93 | 114,2
Energetic class: A++
CRI (Color Rendering): >90

IP: 40
Class: Class III
Volts (Out): 24V
Driver's type: On/Off
Type of recessed: Plasterboard
Pieces: 1
Length (mm): 3000



Conforms to European directives



Type of disposal



Conforms to the ROHS directive



Protection index



Insulation class




Operating voltage (Out)




Equipment



Equipment

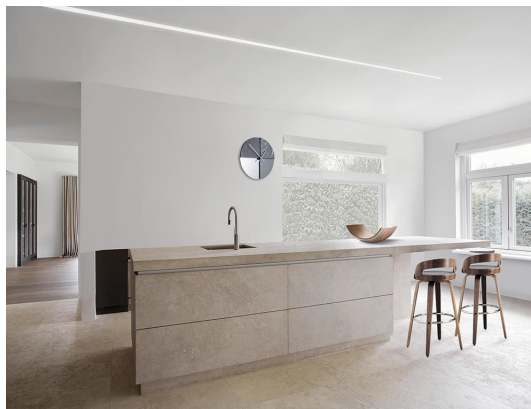

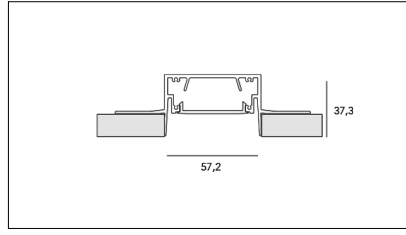

Article code	Article	Colour	Type of recessed	Light Temperature (°K)	Watt (W)	Length (mm)
1324.0245.00.94	MX2_45/DO-94 L=max 3m	White (94)	Plasterboard			
1324.0245.01.94	MX2_45/DO/3000-94 L=3m - EMPTY STANDARD	White (94)	Plasterboard			3000
1324.0245.120.2700.94	MX2_45/9,6W/2700°K-94	White (94)	Plasterboard	2700	9.6	
1324.0245.120.4000.94	MX2_45/9,6W/4000°K-94	White (94)	Plasterboard	4000	9.6	
1324.0245.120.94	MX2_45/9,6W/3000°K-94	White (94)	Plasterboard	3000	9.6	
1324.0245.240.2700.94	MX2_45/19.6W/2700°K-94	White (94)	Plasterboard	2700	19.6	
1324.0245.240.4000.94	MX2_45/19.6W/4000°K-94	White (94)	Plasterboard	4000	19.6	
1324.0245.240.94	MX2_45/19.6W/3000°K-94	White (94)	Plasterboard	3000	19.6	