

MACROLUX



rf_70 LED

Recessed - A scomparsa

Colour: Black (2) | White (4)
Beam angle (°): 20 | 40
Light Temperature (°K): 2700 | 3000 | 4000
Watt (W): 6 | 9
Luminous flux (lm): 615 | 1025
Luminous efficiency (lm/w): 102,5 | 114

Energetic class: A++
CRI (Color Rendering): >90
IP: 40
Driver's type: On/Off
Type of recessed: Plasterboard



Conforms to European directives



Type of disposal



Conforms to the ROHS directive





Protection index





Equipment




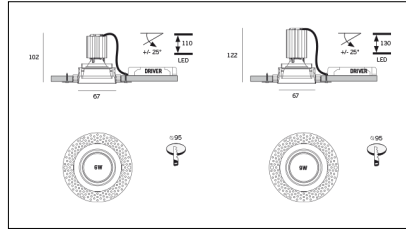

Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Type of recessed	Watt (W)
18.1002.01.20.2	RF_70/LED-2 6W 350mA 20°	Black (2)	3000	20	Plasterboard	6
18.1002.01.2700.20.2	*RF_70 LED	Black (2)	2700	20	Plasterboard	6
18.1002.01.2700.40.2	*RF_70 LED	Black (2)	2700	40	Plasterboard	6
18.1002.01.40.2	RF_70/LED-2 6W 350mA 40°	Black (2)	3000	40	Plasterboard	6
18.1002.01.4000.20.2	*RF_70 LED	Black (2)	4000	20	Plasterboard	6
18.1002.01.4000.40.2	RF_70/LED-2 6W 350mA 40° 4000°K	Black (2)	4000	40	Plasterboard	6
18.1002.02.20.2	RF_70/LED-2 9W 500mA 25°	Black (2)	3000	20	Plasterboard	9
18.1002.02.2700.20.2	RF_70/LED-2 9W 500mA 25° 2700°K	Black (2)	2700	20	Plasterboard	9
18.1002.02.2700.34.2	RF_70/LED-2 9W 500mA 40° 2700°K	Black (2)	2700	40	Plasterboard	9
18.1002.02.34.2	RF_70/LED-2 9W 500mA 40°	Black (2)	3000	40	Plasterboard	9
18.1002.02.4000.20.2	*RF_70 LED	Black (2)	4000	20	Plasterboard	9
18.1002.02.4000.34.2	*RF_70 LED	Black (2)	4000	40	Plasterboard	9

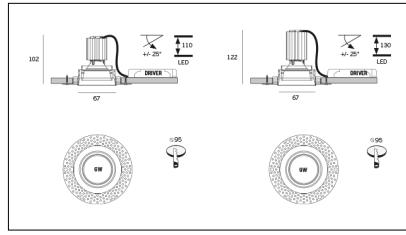

Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Type of recessed	Watt (W)
18.1002.01.20.4	RF_70/LED-4 6W 350mA 20°	White (4)	3000	20	Plasterboard	6
18.1002.01.2700.20.4	*RF_70 LED	White (4)	2700	20	Plasterboard	6
18.1002.01.2700.40.4	RF_70/LED-4 6W 350mA 40° 2700°K	White (4)	2700	40	Plasterboard	6
18.1002.01.40.4	RF_70/LED-4 6W 350mA 35°	White (4)	3000	40	Plasterboard	6
18.1002.01.4000.20.4	*RF_70 LED	White (4)	4000	20	Plasterboard	6
18.1002.01.4000.40.4	*RF_70 LED	White (4)	4000	40	Plasterboard	6
18.1002.02.20.4	RF_70/LED-4 9W 500mA 25°	White (4)	3000	20	Plasterboard	9
18.1002.02.2700.20.4	*RF_70 LED	White (4)	2700	20	Plasterboard	9
18.1002.02.2700.34.4	RF_70/LED-4 9W 500mA 40° 2700°K	White (4)	2700	40	Plasterboard	9
18.1002.02.34.4	RF_70/LED-4 9W 500mA 40°	White (4)	3000	40	Plasterboard	9
18.1002.02.4000.20.4	*RF_70 LED	White (4)	4000	20	Plasterboard	9
18.1002.02.4000.34.4	RF_70/LED-4 9W 500mA 40° 4000°K	White (4)	4000	40	Plasterboard	9



Article code	Name	Description
18.1002.PK	RF_70/PK	Plaster kit per proiettore ad incasso RF_70