



horto 80/3

Surface mounted - Soffitto

Colour: Black (2) | White (4)
Volts (In): 230V
Additional colour: Black (2) | White (4)
Beam angle (°): 20 | 40
Light Temperature (°K): 2700 | 3000 | 4000
Watt (W): 18

Luminous flux (lm): 1845
Energetic class: A++
CRI (Color Rendering): >90
IP: 40
Class: Class I
Driver's type: On/Off



Conforms to European directives



Conforms to the ROHS directive



Insulation class



Type of disposal






Protection index






Equipment





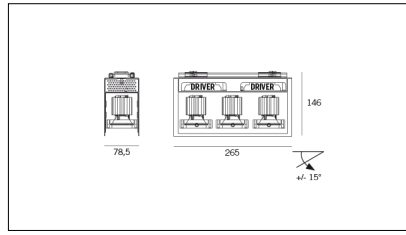




Article code	Article	Colour	Additional colour	Light Temperature (°K)	Watt (W)	Beam angle (°)
815.0224.01.20.42	HP3/LED-42 3x 6W 350mA 20°	White (4)	Black (2)	3000	18	20
815.0224.01.40.42	HP3/LED-42 3x 6W 350mA 40°	White (4)	Black (2)	3000	18	40

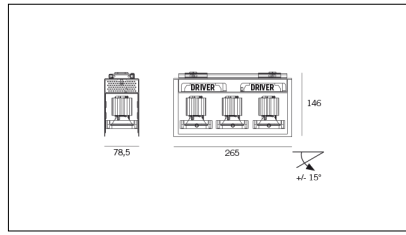

Article code	Article	Colour	Additional colour	Light Temperature (°K)	Watt (W)	Beam angle (°)
815.0224.01.20.22	HP3/LED-22 3x 6W 350mA 20°	Black (2)	Black (2)	3000	18	20
815.0224.01.2700.20.22	HP3/LED-22 3x 6W 350mA 25° 2700°K	Black (2)	Black (2)	2700	18	20
815.0224.01.40.22	HP3/LED-22 3x 6W 350mA 40°	Black (2)	Black (2)	3000	18	40

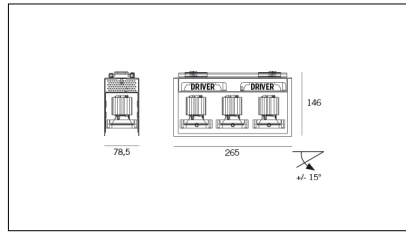

Article code	Article	Colour	Additional colour	Light Temperature (°K)	Watt (W)	Beam angle (°)
815.0224.01.20.24	HORTO 80/3	Black (2)	White (4)	3000	18	20
815.0224.01.40.24	HP3/LED-24 3x 6W 350mA 40°	Black (2)	White (4)	3000	18	40

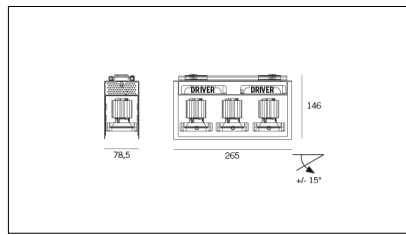

Article code	Article	Colour	Additional colour	Light Temperature (°K)	Watt (W)	Beam angle (°)
815.0224.01.20.44	HP3/LED-44 3x 6W 350mA 20°	White (4)	White (4)	3000	18	20
815.0224.01.40.44	HP3/LED-44 3x 6W 350mA 40°	White (4)	White (4)	3000	18	40